

FL SERIES



LUMINAIRE CHARACTERISTICS

100 - 277 Vac 50-60 Hz PF \leq 0.93
 50,000 Hours Lifespan 30° C @ L70
 Energy Savings between 50 - 75%

Inclusive respirator (anti fog)
 Diecast aluminium body
 Fixtures - 304 stainless steel
 Operating temperature -10° ~ +55°
 Beam Angle 120° & 180°



Warranty - 5 Years

FL SERIES OPTIONAL EXTRAS

Motion sensing control
 Daylight sensor control
 1 - 10V dimming control
 Retrofit bracket mounting

CE | RoHS | UL | FC

Part No	FL 80W	FL 100W	FL 150W	FL 200W
Wattage	80W	100W	150W	200W
Chipset	Epistar / Nichia / Philips			
LED Driver	Meanwell			
Surge Protection	10 kV			
Input Voltage	100-277 Vac / 277-488 Vac 50Hz PF \geq 0.93			
Luminous Efficacy	135 lm/W			
CCT	5,000K 6,000K			
CRI	RA >70 RA >80			
Beam Angle	120° & 180°			
IP Rating	IP 66			
Certification	CE RoHS UL FC			

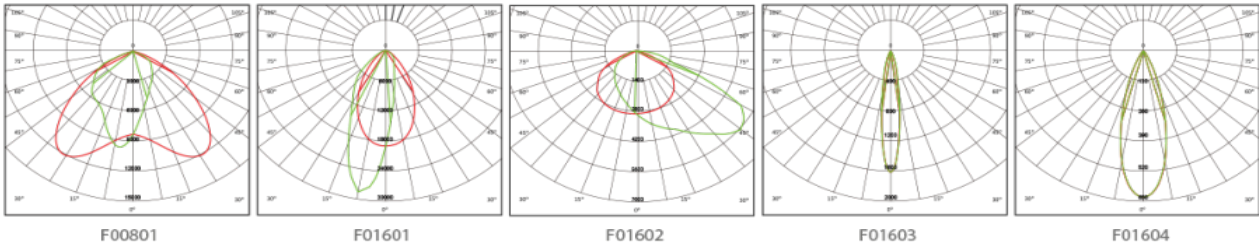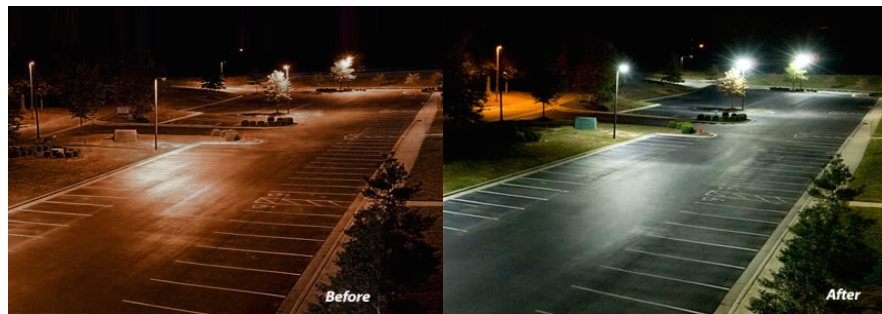

|