

LHB SERIES



LUMINAIRE CHARACTERISTICS

100 - 277 Vac 50-60 Hz PF \leq 0.93
 50,000 Hours Lifespan 30° C @ L70
 Energy Savings between 50 - 75%

Tempered safety glass
 Diecast aluminium body
 Fixtures - 304 stainless steel
 Operating temperature -10° ~ +55°
 Beam Angle 60°, 90°, 120° Optional


Warranty - 3 Years 24 Hour Shift
 Warranty - 5 Years 12 Hour Shift

HB SERIES OPTIONAL EXTRAS


Occupancy control
 Daylight sensor control
 1 - 10V dimming control
 Retrofit chain mounting

CE | RoHS | UL | FC


Part No	LHB-150W
Wattage	150 W
Chipset	Philips / Nichia
LED Driver	Meanwell
Surge Protection	6 kV
Input Voltage	100-277 Vac / 277-488 Vac 50Hz PF \geq 0.93
Luminous Efficacy	120 lm/W
CCT	3,000K 4,000K 5,000K 6,000K
CRI	RA>80
Beam Angle	60° 90° 120°
IP Rating	IP 65
Certification	CE RoHS UL FC

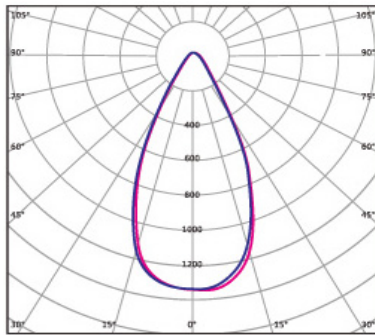

60°

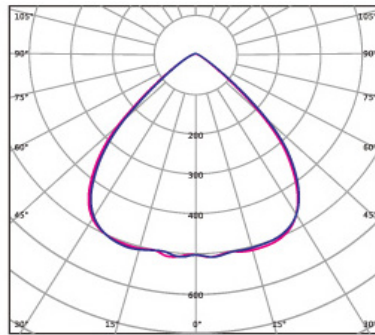

90°

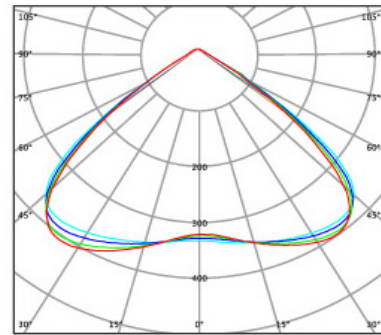

120°