



Gold RR - SERIES

LUMINAIRE CHARACTERISTICS

85 - 265 Vac 50-60 Hz PF \leq 0.95
 30,000 Hours Lifespan 30° C @ L70
 Energy Savings between 50 - 75%

Flush Ceiling Mount
 Polycarbonate body - White
 Fixtures - 304 stainless steel
 Operating temperature -20° ~ +50°
 Beam Angle 120°


Warranty - 3 Years

OPTIONAL EXTRAS

Motion sensing control
 Daylight sensor control

CE | RoHS | UL | FC

Part No	Gold Round Recessed Series
Wattage	6W 9W 12W 15W 18W
Housing	White Polycarbonate
Chipset	SMD (Surface Mount Diode)
LED Driver	OEM External Driver
Power Factor	0.9 PF
Surge Protection	2 kV
Input Voltage	85-265 Vac 50Hz PF \geq 0.95
Luminos Efficacy	100 lm/W
CCT	3,000K 4,000K 6,000K
CRI	RA>80
Beam Angle	120°
IP Rating	IP 22
Certification	CE RoHS UL FC

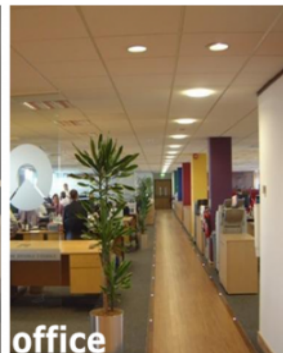

6w

Diameter: 120mm
 Cut out: 105mm



9w

Diameter: 145mm
 Cut out: 130mm



12w

Diameter: 170mm
 Cut out: 155mm



15w

Diameter: 190mm
 Cut out: 175mm



18w

Diameter: 220mm
 Cut out: 205mm